Bel-Air Black EVA Underlayment

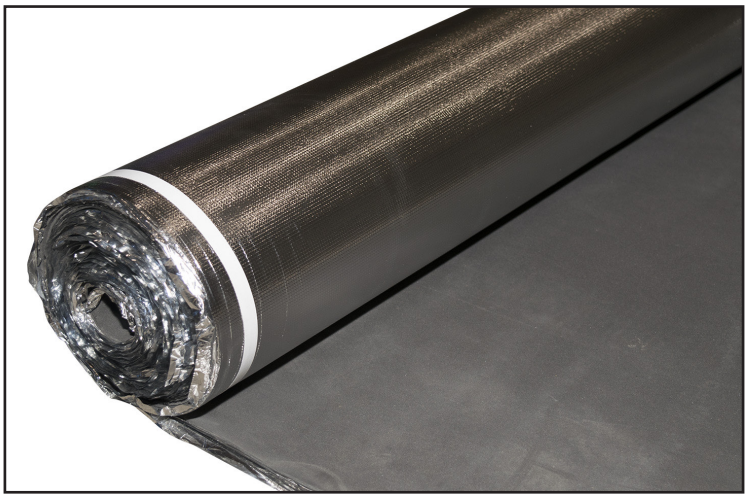

ROLL DIMENSIONS:

Ft.2 Per Roll:	100
Thickness:	2.0mm.
Width:	44" (3.75Ft.)
Length:	320" (27 Ft.)
Weight:	5 Lbs.

FEATURES:

- **100% Vapor Barrier**
- **100% Electrical Insulator**
- **100% Mold & Mildew Resistant**
- **100% Environment friendly**

SOUND & IMPACT PROPERTIES

Impact Insulation Class (IIC): 66dB
Field Impact Insulation Class (FIIC): 65dB
Sound Transmission Class (STC): 69dB

TEST ITEMS	TEST METHODS	TEST RESULTS
Content of Pentachlorophenol (PCP)	EN14041:2004/AC:2006 Clause 4.2+Annex B & EN 12673:1999	ND
Formaldehyde Emission	EN14041:2004/AC:2006 Clause 4.3 & EN 717-1:2004	ND Class E1
Slip Resistance	EN 14041:2004/AC: 2006 Clause 4.5 & EN 13893:2002	Dynamic coefficient of friction: X direction: 0.66 • Y direction: 0.61 Technical class DS "
Thermal Conductivity	EN 14041:2004/AC: 2006 Clause 4.7 & EN 12664:2001	0.039 W/(m·K)
Thermal Resistance	EN 14041:2004/AC: 2006 Clause 4.7 & EN 12664:2001	0.084 (m2·K)/W
Substances of Very High Concern (SVHC)	In House Method	Concentrations of tested SVHC are ≤0.1% (w/w) - PASS "

5 LIGHT WARRANTY YEARS

25 WARRANTY YEARS

Bel-Air Black EVA Underlayment

2MM Black EVA Underlayment Combined With Aluminum Foil

BEL AIR
WOOD FLOORING

Bel-Air Brown EVA(Ethylene Vinyl Acetate) acoustic underlayment provides an extremely high sound resistance ratings. Constructed with closed cell waterproof technology and an aluminum foil layer that acts as vapor barrier for additional dimensional stability, sound resistance and moisture control.

LOW VOC

Impact Insulation Class (IIC): **73dB**

Field Impact Insulation Class (FIIC): **65dB**

Sound Transmission Class (STC): **72dB**

100% Environment friendly

100% Mold & Mildew Resistant

100% Electrical Insulator

100% Vapor Barrier